

# AeroFilm® PP230



## Key Features

- Service temperatures to 230°C
- 100% PA66 (Nylon 66)
- High tear-strength
- Aerospace and wind energy

## Product Description

Aerofilm® PP230 is a high specification 85gsm PA66 (Nylon 66) peel ply offering higher tear-strength and operating temperatures and an easier release from cured laminate compared to our standard polyester peel ply.

PP230 PA66 peel ply is generally specified for aerospace/prepregs applications and large scale wind energy projects. It has a very high maximum operating temperature of 230°C making it suitable for use even with high cure temperature prepregs.

During production, the peel-ply is rinsed and heat-treated to eradicate any surface contamination.

PP230 is recommended for any prepreg curing requiring a peel ply (for example where secondary bonding will be undertaken) although care should be taken to ensure that prepreg laminates are not 'dried out' by the peel ply which will absorb some resin during cure.


PP230 is also recommended for applications where peel ply removal is proving difficult, including some epoxy resin infusion projects. Although not release coated, PA66 does provide a slightly improved release from the cured laminate and the added strength of the peel ply makes tear removal more consistent.

## Recommended Uses

- Prepregs (particularly aerospace and wind energy)
- Resin infusion (where polyester peel ply removal is proving difficult)

## Typical Use

PP230 can be used like any conventional peel ply and is most commonly positioned directly against the prepreg laminate or reinforcement.

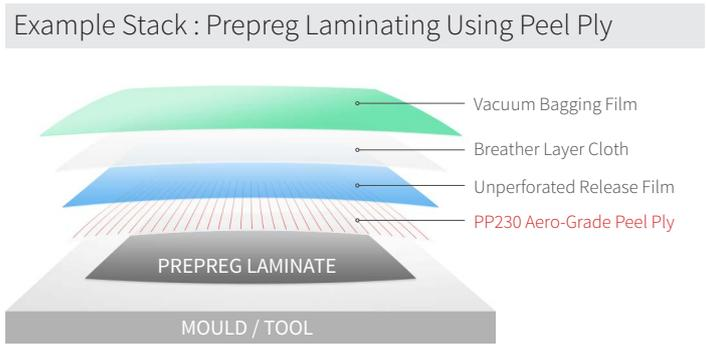

## Specification

Property	Units	Value
Material	-	PA/Nylon 66
Width	mm	1520 (-0 +2%)
Format	-	Single Sheet
Areal Weight	g/m <sup>2</sup>	85 ± 10%
Maximum Use Temperature	°C	230
Appearance	-	White with red tracer

## Handling & Storage

PP230 is a stable PA66 material with no special handling or storage requirements.

## Disclaimer

This data is not to be used for specifications. Values listed are for typical properties and should not be considered minimum or maximum.

Our technical advice, whether verbal or in writing, is given in good faith but Easy Composites Ltd gives no warranty, express or implied, and all products are sold upon condition that purchasers will make their own tests to determine the quality and suitability of the product for their particular application and circumstances.

Easy Composites Ltd shall be in no way responsible for the proper use and service of the product, nor for the safeguarding of personnel or property, all of which is the duty of the user. Any information or suggestions are without warranty of any kind and purchasers are solely responsible for any loss arising from the use of such information or suggestions. No information or suggestions given by us shall be deemed to be a recommendation to use any product in conflict with any existing patent rights. Before using any of our products, users should familiarise themselves with the relevant technical and safety datasheets provided by Easy Composites Ltd.

Aerofilm® is a trademark of Easy Composites Ltd.