

### Key Features

- Very cost-effective
- Service temperature up to 125°C
- Excellent release properties

### Description


R120 is a very cost-effective, general purpose release film with P3 perforations suitable for use at temperatures up to 120°C. It is recommended when vacuum bagging hand-layup laminates.

### Typical Uses

- Vacuum bagging wet layup laminates
- Debulking prepregs

Perforated release film is suited to debulk prepreg laminates where it prevents the breather from sticking to the uncured material. It is also used in wet layup vacuum bagging after the peel ply to help reduce the amount of resin which is absorbed up into the breather.

### Example Stack : Vacuum Bagged Wet-Layup

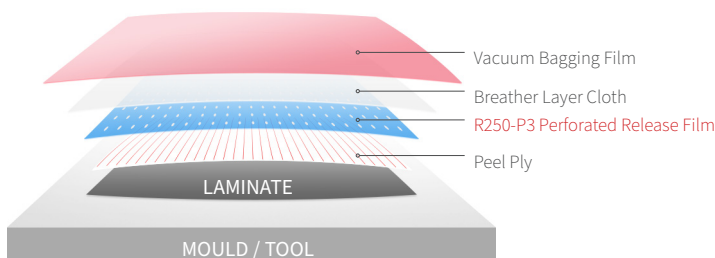

### Specification

Property	Unit	Test Method	Value
Material	-	-	Polyolefines and HDPE
Width	mm	Internal	1500 (-0 +10%)
Format	-	-	Single Sheet
Nominal Thickness	µm	ISO 4593	28 ± 10%
Maximum Use Temperature	°C	Internal	125
Tensile Strength at Break MD	N/mm <sup>2</sup>	ASTM D882	38 ±10%
Tensile Strength at Break TD	N/mm <sup>2</sup>	ASTM D882	30 ±10%
Elongation at Break MD	%	ASTM D882	360 ±10%
Elongation at break TD	%	ASTM D882	630 ±10%
Appearance	-	-	Light Blue Opaque

### Handling & Storage

R120-P3 is a stable polyolefines/HDPE film with no special handling or storage requirements.

### Disclaimer

This data is not to be used for specifications. Values listed are for typical properties and should not be considered minimum or maximum. Our technical advice, whether verbal or in writing, is given in good faith but Easy Composites Ltd gives no warranty; express or implied, and all products are sold upon condition that purchasers will make their own tests to determine the quality and suitability of the product for their particular application and circumstances.

Easy Composites Ltd shall be in no way responsible for the proper use and service of the product, nor for the safeguarding of personnel or property, all of which is the duty of the user. Any information or suggestions are without warranty of any kind and purchasers are solely responsible for any loss arising from the use of such information or suggestions. No information or suggestions given by us shall be deemed to be a recommendation to use any product in conflict with any existing patent rights. Before using any of our products, users should familiarise themselves with the relevant technical and safety datasheets provided by Easy Composites Ltd.

AeroFilm™ is a trademark of Easy Composites Ltd.

### Leaders in materials, equipment and training for advanced composites