



## Key Features

- 210°C service temperature
- 100% FEP construction
- Ultra-light 13 µm thickness
- Very conformable
- Excellent elongation

## Product Description

AeroFilm™ R210 Unperforated Prepreg Release Film is a high specification FEP release film designed to offer the very best performance for autoclave and out-of-autoclave prepreg manufacturing.

In common with bagging film, the flexibility and conformability of the release film can make a significant difference to the quality of the cured laminate, especially to the prevalence of pin-holing and corner voiding.

R210 is just 13µm thick resulting in excellent elongation and conformability making it easier to ensure that the release film is down properly against the laminate, reducing corner bridging and improving consolidation, especially for sensitive out-of-autoclave processing.

As an FEP film, R210 also offers the potential for high temperature processing (up to 210°C/410°F) along with excellent chemical resistance and self-release from a wide range of resins including epoxy, polyester, vinylester and phenolics.


## Recommended Uses

- Out-of-autoclave prepreg vacuum bagging
- Autoclave prepreg vacuum bagging
- High temperature applications (up to 210°C/410°F)
- Gloss finishing composite repairs

## Typical Use

Most commonly, AeroFilm™ R210 Unperforated Prepreg Release Film is used as a release film when vacuum bagging prepreg composites for out-of-autoclave or autoclave cure. The film is applied directly onto the back of the prepreg laminate, covering the whole surface and acts as a thin, conformable, non-stick barrier between the laminate and the breather fabric.

### Example Stack : High Temperature Prepreg Laminating

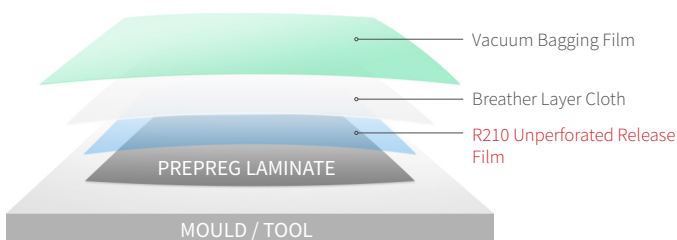

## Specification

Property	Units	Method	Value
Material	-	-	100% FEP
Width	mm	Internal	1200 (-0 +10%)
Format	-	-	Single Sheet
Nominal Thickness	µm	ISO 4593	13 ± 10%
Maximum Use Temperature	°C	Internal	210
Areal Weight	g/m <sup>2</sup>	Internal	28 ±5%
Tensile Strength at Break MD/TD	N/mm <sup>2</sup>	ASTM D882	> 24 ±10%
Elongation at Break MD/TD	%	ASTM 527-3	> 100 ±10%
Appearance	-	-	Pink Translucent.

## Alternative Widths & Formats

This film is held in stock at the 1.20m width. Special widths (and formats) may be available for large orders, subject to a minimum order quantity.

## Handling & Storage

R210 is a stable fluoropolymer film with no special handling or storage requirements.

## Disclaimer

This data is not to be used for specifications. Values listed are for typical properties and should not be considered minimum or maximum.

Our technical advice, whether verbal or in writing, is given in good faith but Easy Composites Ltd gives no warranty, express or implied, and all products are sold upon condition that purchasers will make their own tests to determine the quality and suitability of the product for their particular application and circumstances.

Easy Composites Ltd shall be in no way responsible for the proper use and service of the product, nor for the safeguarding of personnel or property, all of which is the duty of the user. Any information or suggestions are without warranty of any kind and purchasers are solely responsible for any loss arising from the use of such information or suggestions. No information or suggestions given by us shall be deemed to be a recommendation to use any product in conflict with any existing patent rights. Before using any of our products, users should familiarise themselves with the relevant technical and safety datasheets provided by Easy Composites Ltd.

AeroFilm™ is a trademark of Easy Composites Ltd.