

Key Features

- Precision temperature control
- Ambient to 204°C / 400°F
- Programmable ramp and soak
- Two independent vacuum ports
- Very high thermal efficiency
- Powerful 2kW heating power
- Fan assisted forced convection
- Rugged build for production use
- Touch screen controller

“Unrivalled value for money along with incredible features and performance put OV301 in a league of its own”


Designed, manufactured and quality assured in-house by Easy Composites Ltd in the UK, OV301 is a fully featured programmable industrial curing oven for convenient bench-top installation.

The oven is particularly suited for composites use, including curing or post-curing laminates, prepregs, thermoplastics, castings and moulds.

The precision manufactured, sturdy design is engineered for demanding everyday production use whilst the convenient bench-top size and precision control makes the oven equally suited to laboratory or R&D use.

OV301 has been meticulously designed to offer unrivalled thermal efficiency meaning that complete prepreg curing cycles can be completed for only a few pence.

Precision Temperature Control with Ramp and Soak/Dwell Functionality

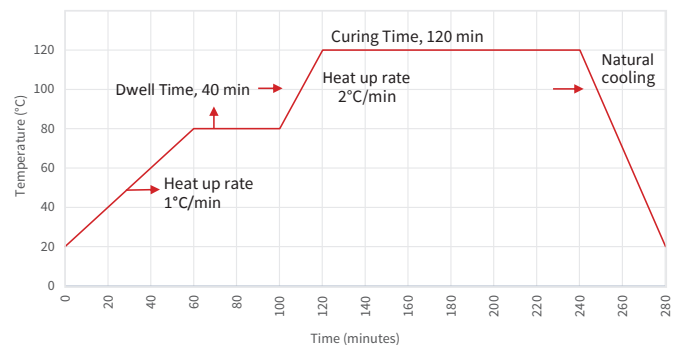

Example prepreg curing cycle.

Recommended For:

- Curing of prepreg composite parts
- Post-curing of high temperature moulds and tooling
- Curing thermoplastics such as PP and PLA
- Curing silicones and casting resins
- Research and development/material testing

The oven delivers the highest standards of PID temperature control accuracy, utilising high-quality calibrated thermocouple temperature measurement coupled with effective fan-assisted airflow to minimise stratification.

OV301 includes full ‘ramp and soak’ temperature control which can control heating rates (degrees per minute), and hold for a specific length of time at set temperatures. Although useful in a range of curing processes, ‘ramp and soak’ control like this is a feature usually reserved for advanced laboratory ovens and autoclaves.

Temperature, ramp and soak are all fully programmable so recommended cure and post-cure cycles for different materials can be saved and run automatically for the ultimate in precision and consistency.



Features & Options

OV301 has been designed from the ground-up to offer all the functionality desirable in a fully-featured composites curing oven and as such is available with a choice of options to ensure it provides a 'turn-key' system to match your needs.

Touch Screen controller



Developed and manufactured by Easy Composites, the touchscreen controller allows the user to intuitively create and run even the most complex ramp and dwell programs. The onscreen graphing overlays a live temperature trace of the internal temperature as well as the auxiliary sensor temperature on to the complete program profile.

Vacuum Valve/Guage Assemblies



OV301 includes two integral ports which can be supplied complete with optional gauge and valve assemblies for convenient connection of one or two separate vacuum lines into the oven. Photo shows two optional vacuum valves fitted.

Additional Shelf



The OV301 Precision Composites Curing Oven is supplied with one internal shelf as standard. Adding an additional shelf can provide more flexibility when loading, particularly when loading smaller items.

Spare Parts

A full set of spare parts is available for the oven from stock, including replacement door seal, fan, heating element and the complete control and power assembly. Please contact sales for pricing.

Specification

Mains Power	230v/50hz	
Max. Oven Temperature	204°C (400°F)	
Max. Power Consumption	2.2kw	
Maximum Current	9.1 Amps	
Internal Capacity	Width	1070mm
	Depth	500mm max (475mm min)
	Height	500mm
External Dimensions	Width	1255mm
	Depth	688mm
	Height	655mm
Total Weight	80.0kgs	
Maximum Ambient Temp.	35°C (95°F)	
Maximum Shelf Load	20kgs (per shelf)	
Set Temperature Accuracy	1°C	
Program Modes	Multiple program capacity with 16 Programmable Segments	
Communication	Optional USB Module	
Material/Appearance	Grey Powdercoat / Galvanised Steel	
Transport Information	1200mm x 800mm Pallet (790mm High)	
Safety Features	Bimetallic Thermal Cut Out	
Safety Standards	CE Marked, BS EN 61010-2-010	

Europe-wide Delivery

OV301 is available for same day dispatch for delivery throughout the UK and Europe. The oven is shipped on a standard pallet by road transport with preferential delivery prices throughout mainland Europe.

Disclaimer

This data is not to be used for specifications. Values listed are for typical properties and should not be considered minimum or maximum.

Our technical advice, whether verbal or in writing, is given in good faith but Easy Composites Ltd gives no warranty, express or implied, and all products are sold upon condition that purchasers will make their own tests to determine the quality and suitability of the product for their particular application and circumstances.

Easy Composites Ltd shall be in no way responsible for the proper use and service of the product, nor for the safeguarding of personnel or property, all of which is the duty of the user. Any information or suggestions are without warranty of any kind and purchasers are solely responsible for any loss arising from the use of such information or suggestions. No information or suggestions given by us shall be deemed to be a recommendation to use any product in conflict with any existing patent rights. Before using any of our products, users should familiarise themselves with the relevant technical and safety datasheets provided by Easy Composites Ltd.

OV301 is a trademark of Easy Composites Ltd.

Easy Composites Ltd

Unit 39, Park Hall Business Village,
Stoke on Trent, Staffordshire, ST3 5XA
United Kingdom.
Tel. +44 (0)1782 454499
Email sales@easycomposites.co.uk
Web www.easycomposites.co.uk

Easy Composites EU B.V. (EU Customers)

Beneluxbaan 16,
Rijen, 5121 DC
Netherlands
Web www.easycomposites.eu

